

**CONSTRUCTION MACHINERY** 



## EXCAVATORS 26

Engine YANMAR 3TNV80F Rated power 15.2 kW / 2500 rpm Bucket capacity 0.06 m<sup>3</sup> Operating mass **2760 kg** 

### SANY

### For challenging tasks, you need a first-class partner

Quality comes from experience. And from new ideas. This is why we combine these two crucial factors at SANY. This is because we are one of the world's leading producers, having sold more than 250 000 excavators in 10 years. This means that you can always rely on sophisticated products that have been tried and tested in practice. An impressive 5–7% of our annual turnover is dedicated to research and development. This is why we give you not only our word, but also our extraordinary five-year warranty as a guarantee of how powerful and robust our products are.

250000 EXCAVATORS SOLD IN 10 YEARS

5-7%
TURNOVER FOR RESEARCH AND DEVELOPMENT

### FIVE-YEAR WARRANTY\*





# Max. bucket digging force 27.9 kN (ISO) Max. arm digging force 14.2 kN (ISO) Swingspeed 10 rpm Max. travel speed 4.5 km/h

# THE MOST COMPACT COMBINATION OF PERFORMANCE AND FUNCTIONALITY

The "small" machines from SANY have always been among the greatest when it comes to cost effectiveness and efficiency — it's no different for the new SY26U mini excavator. It's in its element wherever it can demonstrate its speed and power, even in confined spaces. Its manoeuvrability and extremely precise control are also impressive in road

construction, horticulture and landscaping. The new small model shows its strengths even when just travelling to the workplace, as its comparatively low weight and compact dimensions allow for fast and safe loading and unloading. The SY26U is also available with cab or as a canopy version.\*

<sup>\*</sup> The following texts in the brochure refer to both the cabin version and the canopy version of the SY26U.

**FCONOM** 

### FOR INTELLIGENT MINDS – PRODUCTIVITY MADE SIMPLE

The new SY26U boasts a whole host of properties that allow you to make crucial savings. These include, for example, the advanced load-sensing hydraulic system designed to improve speed and performance whilst simultaneously reducing fuel consumption.



DIMENSIONS

### If you want to set your sights high, you will have to dig down deep

You won't reach your limits in a hurry with the new SANY mini excavator. The robust boom design and carefully considered weight distribution allows a maximum horizontal reach of 4850 mm, a maximum vertical reach of 4410 mm and an excavation depth of 2820 mm.

Its structure as a short-tail-swing machine ensures that it can work well and quickly even on construction sites where space is tight.





### Absolute reliability – for peace of mind!

SANY's five-year warranty\* gives you the assurance that you can fully count on your equipment.

\* With participating partners

### USER EXPERIENCE

Always making work easier – everyday work can be demanding for the excavator operator. We make it all a bit easier, for example, thanks to the comfortable air-suspension seat or the large high-resolution colour

### **DIMENSIONS**

Small powerhouse – with its compact di-mensions and manoeuvrability, the short-tail-swing excavator can do its job best where space is tight, and the smart swivel bracket solution lends it increased agility.

### QUALITY

### Robustness included. And a five-year warranty

From the choice of materials and the design, right through to the workmanship, durability and robustness is a priority for all SANY mini excavators. They have been tried and tested time and again in tough practical applications. For example, all cladding parts are made solely of sheet metal, which makes them particularly long-lasting and easy to repair when necessary. And the five-year warranty gives you the peace of mind that you can fully count on your equipment.

Cleverly thought out – even when the cab doors are open, they still fit within the machine's turning radius.



### SAFETY

**QUALITY** 

Robust reliability - even the small models

it must be able to withstand enough. This is

why they are build and machined solidly from

the ground up, for example with highly-

pre-cise robot-welded seams, for example.

from SANY can work powerfully, meaning that

Inherently safe – the SY26U is equipped with numerous safety details as standard. These include lockable covers and a battery disconnection switch, and the cylinder protection on the hoom.

### **COMPONENTS**

Improved details – good visibility is the foundation for good work. Powerful LED work lights illuminate the work area evenly. The YANMAR drive unit also impresses thanks to its reliability and power.

### **ECONOMY**

Cost effectiveness as a benchmark – the efficient load-sensing hydraulic system con-trols the variable flow rate of the piston pumps, thereby guaranteeing sufficient power to carry out all operations smoothly and safely, as only the required power is provided.





**USER EXPERIENCE** 

**Convenient maintenance is at the** top of the agenda thanks to rear access

The wide-opening engine bonnet and the clear arrangement of the key components in the centre make maintenance and service quick and easy; the air filter, water separator, oil dipstick and oil filler neck are especially easy to reach.



### Operating excavators by sight – truly impressive

A good view of outside is indispensable if you are to perform your work accurately and quickly. The SY26U's cab offers the operator a wide field of view, allowing them to keep an eye on all areas and work steps. The entire work area can be controlled with ease thanks to the large front, side and rear windows, without the driver having to get out of their seat. If work on a construction site takes a little longer, the LED headlights illuminate everything perfectly. Further advantages of this system include its low energy consumption and a much longer service life.





### Our highlights - the added benefits SANY offers you:

- **★** Two auxiliary proportional control circuits as standard
- + Quiet and low-vibration engine
- + Large monitor
- + Efficient load-sensing hydraulic system
- + Responsive, precise control
- + LED work lighting
- + Air-suspension seat
- + Clear displays
- + Optimal visibility on all sides
- + ROPS/FOPS-certified for safety in operation
- + Cab or canopy version

### **TOP MARKS FOR YOUR NEW WORKPLACE**

Safety, comfort, ergonomics... this cockpit has everything you need cause the interior has a carefully considered ergonomic design but system and full seating comfort, due to the seat suspension. In addition, all displays can be read effortlessly on the large, high-reso- for any application. lution colour screen, while the wide field of view provides you with perfect visibility on all sides.

The two auxiliary control circuits allow the adaptation of various to make your day-to-day work more convenient and simple. This attachment devices. This means tilt buckets can also be attached starts when you enter the cab, which you can do comfortably and in addition to the backhoe, in the case of fully integrated control. As safely. And after that? Handling is simply effortless. Not only beis no problem at all; the gripper tongs can be turned using one side also because it offers you a lot of scope to respond. It is also con- of the joystick, and can be opened and closed using the other. Of venient and comfortable thanks to the perfectly designed ventilation course, it is also possible to operate a hammer, thanks to the standard hammer valve. This means you and the machine can be ready





### **ENGINE**

Model	YANMAR 3TNV80F
Тур	Water-cooled three-stroke diesel engine with turbulence chamber fuel injection
Exhaust emissions	Stage V
Rated power	15.2 kW / 2500 rpm
Max. torque	65.6 Nm / 1 793 rpm
Displacement	1 267 ccm
Batteries	1 × 12 V / 60 Ah

### HYDRAULIC SYSTEM

Mainpump	Variable displacement axial piston pump
Max. oilflow	81 I/min
Max. oilflow (AUX 1)	42.5 l/min
Max. oilflow (AUX 2)	42.5 l/min
Travelmotor	Variable displacement axial piston motor
Rotation device	Axial piston motor with parking brake

### SERVICE REFILL CAPACITIES

Fuel tank	341
Engine coolant	4.1 l
Engine oil	3.4
Drive (per side)	0.6 l
Hydraulicsystem	45 I
Hydraulic oil tank	30 I

### PERFORMANCE

Swingspeed	10 rpm
Max. travel speed	High 4.5 km/h, slow 2.6 km/h
Max. travel force	20 kN
Gradeability	0.06 m³
Bucket capacity	0.26 kg/cm <sup>2</sup>
Groundpressure	25°
Bucket digging force ISO	27.9 KN
Arm digging force ISO	14.2 KN

### OPERATING MASS

SY26U	2760 kg
SY26U Canopy	2700 kg

### UNDER AND UPPER STRUCTURE

Boom length	2100 mm
Arm length	1 300 mm
Bottomrollers	3
Rotation device	Axial piston motor with planetary gear runnin in oil bath and single-row slewing ring. Spring-loaded slewing gear parking brake, hydraulically released.
Undercarriage	Reinforced lower structure with larger dimensions. Welded drive frame in box

design made of special material. Side frame welded to the drive frame.

### RELIEF VALVE SETTINGS

Implement circuit	245 bar	
Swing circuit	196 bar	
Travle circuit	245 bar	
Pilot pressure	35 bar	

### LIFTING CAPACITIES OF LOWER DOZER BLADE


K			Radi	Digging reach						
20	_	2,0	m	3,0 ו	3,0 m		4,0 m		Max.	
Load poin	nt	<b>)</b>		<b>—</b>	5	<b>—</b>		<b>)</b>		
4,0 m	kg							693	584	2590
3,0 m	kg			623	470			540	365	3550
2,0 m	kg			707	459	501	282	493	282	4000
1,0 m	kg			937	421	717	274	507	256	4180
Ground line	kg	1521	715	1095	398	732	267	582	263	4045
- 1,0 m	kg	1807	722	1012	395			730	316	3560
- 2,0 m	kg	883	786					609	576	2420

### LIFTING CAPACITIES OF UPPER DOZER BLADE

k		Radius						Digging reach		
4-5	_	2,0 r	n	3,0 ı	3,0 m		4,0 m		Max.	
Load poir height	nt	<b>&gt;=</b> 3		<b>&gt;=</b> 3		<b>&gt;—3</b>		<b>)</b>		
4,0 m	kg							693	584	2590
3,0 m	kg			564	470			438	365	3550
2,0 m	kg			549	459	340	282	340	282	4000
1,0 m	kg			515	421	332	274	310	256	4180
Ground line	kg	910	715	488	398	324	267	320	263	4045
- 1,0 m	kg	917	722	485	395			385	316	3560
- 2,0 m	kg	883	786					609	576	2420


### **DIMENSIONS (TRANSPORT)**


Α	Transport length	4 285 mm
В	Transport width	1 550 mm
С	Upperstructure carriage	1 375 mm
D	Height over cabin/ROPS	2430 mm
E	Height of Boom – transport	1 620 mm
F	Overall length of crawler	2005 mm
G	Tail length	775 mm
Н	Track gauge	1 250 mm
I	Undercarriage width (blade)	1 550 mm
J	Horizontal distance to blade	1295 mm
K	Blade height	300 mm
L	Track height	445 mm
M	Track pads width	300 mm
N	Min. ground clearance	290 mm
0	Counterweigth clearance	555 mm
P	Engine cover height	1 460 mm
Q	Tail swing radius	775 mm
R	Center distance of tumblers	1 560 mm

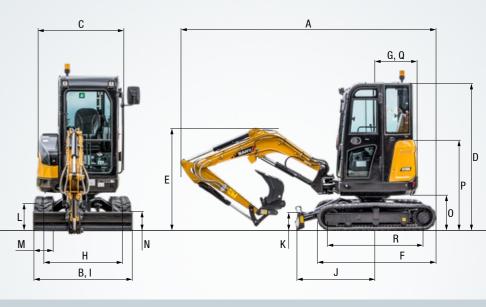

### WORKING AREA

Α	Max. digging reach	4850 mm
В	Max. digging depth	2820 mm
С	Max. digging height	4 410 mm
D	Max. dumping height	3100 mm
E	Min. dumping height	940 mm
F	Max. vertical digging depth	2585 mm
G	Overall height over arm by min. swing radius	3 200 mm
Н	Arm head distance with work	
	equipment retracted as far as possible	1 490 mm
I	Swing radius by max. boomswing (L)	1760 mm
	Swing radius by max. boomswing (R)	1795 mm
	Min. swing radius	2110 mm
J	Max. clearance when blade up	360 mm
K	Max. depth of blade down	380 mm
L	Offset boom (L)	765 mm
	Offset boom (R)	508 mm
	Max. boom-swing angle (L)	67°
	Max. boom-swing angle (R)	45°

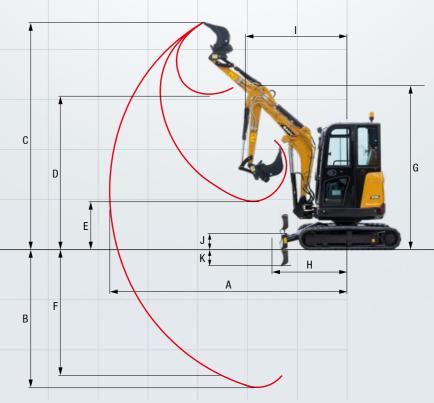

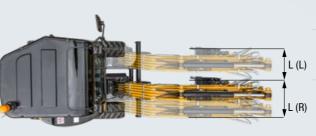

### Powerful and mobile – the **SY26U** is well-equipped by its very nature!

It has everything it needs to become an indispensable aid. Its impressive properties include not only its power and endurance, but also the precise response characteristics of all the components thanks to the sophisticated hydraulic system. Outstanding performance for a fair price: That's what we call cost-effective.

### OPERATORS COMFORT / CABINE

Heater •	
Radio and speaker •	
USB Socket (music)	
Armrests (adjustable)	•
12v outlets •	•
Wiper	701
AUX 1 on Joystick	•
AUX 2 on Joystick	•
Suspended seat •	•
8 stored hydraulic settings for attachments	•
Removable front-window •	

### **SAFETY**

Battery master switch	•	•
Travel Alarm	•	•
Beaconlamp	•	•

### WORKING FOLLIDMENT

WUNKING EQUIFIVIENT		
Breaker&Shear line proportional on Joystick with piping	•	•
Rotation line proportional on Joystick with piping		
Flow adjustment for attachments	•	•
Double acting circuit for hydraulic quick coupler		
with piping	opt.	opt.
Boom and arm load holding valves with overload indicator opt.		opt.

### **WORKING LIGHTS**

Lights - front (LED)	•	
Lights - boom (LED)	•	•

### **UNDERCARRIAGE**

Rubber tracks 300 mm	•	•
Steel tracks	opt.	opt.
Holes/loops for fixing	•	•

### **ENGINE**

Diesel filter	•	•
Cage or storage for grease gun	•	•
Airfilter guard	•	•
Airfilter	•	•

### HYDRAULIC SYSTEM

Swing brake	•	•
2 speed travel	•	•
Mainfilter	•	•
Hydr. Pre-pressure operating joysticks	•	•
Filter for pre-pressure circle	•	•

SY26U • SY26U Canopy

The standard and special options differ depending on the country in which the mini excavator is delivered. If you have any questions, please contact your dealer directly

### Parts supply quick and reliable

With the purchase of a SANY mini excavator you have made an investment in the future. Fast availability of spare parts is your quarantee of minimal downtimes and failure times.



### A SERVICE YOU **CAN RELY ON**

In the event of a breakdown during your warranty period, Vertu will come to your site as soon as possible to get your machine back up and running. If the repair cannot be undertaken on-site or in good time, Vertu will arrange a similar replacement while your machine is repaired under warranty

### **National Service Representation**

Our national service network partnerships provide certainty that you are supported with service and parts, wherever you are located.

### Parts and Inventory

As the dealer of SANY excavators, roading and construction equipment Vertu holds a significant inventory of SANY Genuine and aftermarket parts and attachments, both in New Zealand and Australia to keep you going. With direct relationships locally and internationally we can source parts guickly and as a matter of

### Flexible, Fast and Always there for you




### The added benefits SANY offers you:

- + Fast supply thanks to the New Zealand Vertu Locations
- + Expert knowledge for optimal supply for your
- our dealers are always kept up-to-date so that they can face all technical challenges.

### **Detailed information in black and white**

Handbooks and documents are available for all SANY mini excavators, and these can help you with operation, maintenance, servicing and repairs. These include operating and maintenance instructions and technical specifications



# HIGHLIGHTS SY26U

### COMPACT POWER-HOUSE FOR THE FINER DETAILS

Intricate tasks on construction sites in towns and cities or in horticulture and landscaping depend on manoeuvrability and precise control. This, combined with a great deal of power, makes the SY26U a high-quality power-house, and therefore a reliable partner for you.

### **ROBUST RELIABILITY**

High-quality materials and careful machining guarantee the highest degree of solidity and stability even under stress.

### **ALWAYS COMFORTABLE**

Whether with a **cab** or as a **canopy** – the cockpit is equipped with **comprehensive comfort equipment**, making it easy for the operator to maintain concentration throughout the day.

### **SMALL POWERHOUSE**

Thanks to its **compact design**, the SY26U greatly simplifies working on confined construction sites. With its compact dimensions, it offers the best conditions to be easily attached to a car trailer.

### **INHERENTLY SAFE**

Maximum safety for drivers, the construction site environment and the machine itself is integrated on-board as standard. This means you can count not only on the protection of people and machines, but also on an optimum level of operational safety.

### **IMPROVED DETAILS**

The extensive standard features and equipment with high-quality components from tried and tested brand manufacturers make the SY26U a reliable partner and the machine a universal marvel in virtually every application.

### COST EFFECTIVENESS AS A BENCHMARK

The **smart control system** adapts the pump power to the available engine power. For **greater efficiency** of the hydraulic system and **reduced fuel consumption**.

### **TECHNICAL HIGHLIGHTS**

Engine	YANMAR 3TNV80F
Rated power	15.2 kW / 2500 rpm
Max. torque	65.6 Nm / 1 793 rpm
Max. travel speed	4.5 km/h
Swingspeed	10 rpm
Mainpump	Variable displ. axial piston pump
Max. oilflow	81 I/min



"AGILE, JUST LIKE WE NEED IT!"

Not all products are available in all markets. As part of our continuous improvement process, we reserve the right to modify specifications and designs without giving prior notice. The figures may contain additional options.



Vertu Equipment 0800 837 888 www.vertuequipment.co.nz info@vertuequipment.co.nz Auckland 510 Ellerslie-Panmure Hwy Mount Wellington

Tauranga 67 Hull Road, Mount Maunganui

Christchurch 52 Hickory Place, Islington

